



542559

(43) International Publication Date
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number
WO 2004/065174 A1

(51) International Patent Classification⁷: **B60R 7/04,**
F16B 5/12, E05D 7/10

Daniel, J. [US/US]; 4302 North 168th Avenue, Holland,
MI 49424 (US).

(21) International Application Number:
PCT/US2004/001337

(74) Agent: **RATHE, Todd, A.**; 777 East Wisconsin Avenue,
Milwaukee, WI 53202-5306 (US).

(22) International Filing Date: 16 January 2004 (16.01.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/440,543 16 January 2003 (16.01.2003) US

(71) Applicant (*for all designated States except US*): **JOHN-
SON CONTROLS TECHNOLOGY COMPANY**
[US/US]; 650 Waverly, Holland, MI 49423 (US).


(72) Inventor; and

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

(75) Inventor/Applicant (*for US only*): **SCHEERHORN,**

[Continued on next page]

(54) Title: **SNAP-IN COUPLING ASSEMBLY**

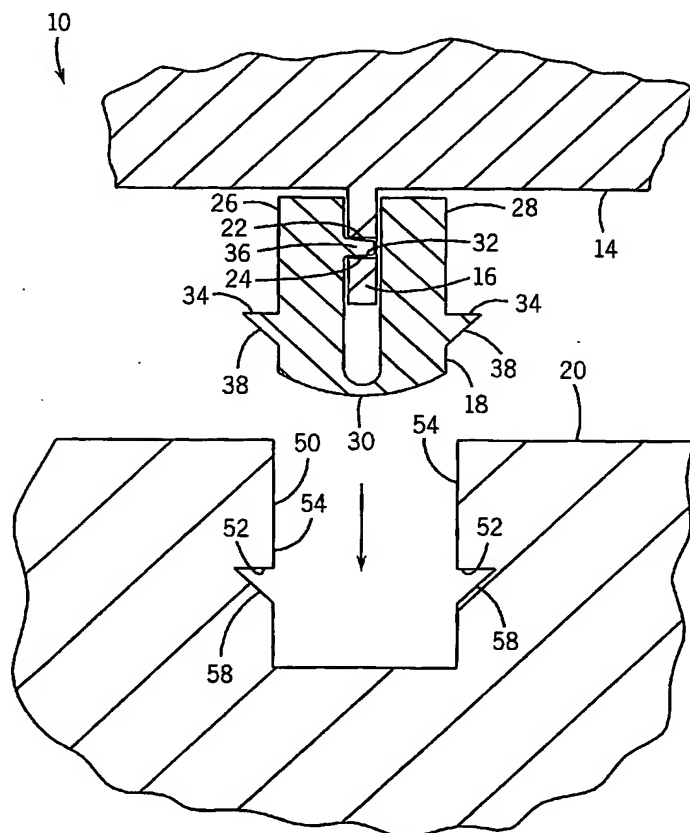

(57) Abstract: Coupling member for use with a first component having a projection and a second component includes a first portion and a second portion. At least one of the first portion and the second portion pivots between a closed position in which at least one of the first portion and the second portion is mechanically locked to the projection and an open position enabling the projection to be separated from the member. The member engages the second component to couple the first component to the second component. The second component engages the member to retain the member in the closed position.

WO 2004/065174 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.